

Wi-Fi Smart Switch

Model: TYTE-D1

Caution:
Do not touch the sensor socket.
For safety, please connect the sensor before powering on.



Parameters:

Input voltage: AC 85V~250V
Max.Current: 16A
Wi-Fi Standard: Wi-Fi 2.4Ghz b/g/n+Bluetooth
Temperature display accuracy: 0.1°C
Working temperature: -20°C~70°C
Size: 96*53*31mm

Checklist before using the device

- Your smart phone or tablet has connected to a 2.4g WiFi with internet.
- You need to enable Bluetooth of the phone.

- You have the correct WiFi PWD.
- You smart phone or tablet must have access to APP store,Google play.
- Your router is MAC-open.

User Guide


- 1 You can download the App by searching "Tuya Smart" in mobile app stores or scanning the following QR code




- 2 Register an Tuya Smart account.
- 3 If you have Tuya Smart account. just login.

Add devices

- 1 Reset the device first: if the network indicator blinking fast (0.5s/time) , skip the reset step.
 - 1 Power on
 - 2 hold down the Reset button for 6 seconds.until network indicator blinking fast(0.5s/time).



- 2 Clicking **+** in the top right corner on tuya smart app.then click "Auto Scan" , wait a few seconds, After the devices are found,Click "Next"



- 3 Select a 2.4GHz Wi-Fi network and enter your password.



- 4 Name your device.




- 5 When the network is disconnected, the switch will automatically switch to the Bluetooth control of the phone.
- 6 Click the on/off buttons on the APP can control device,Manual control switch also can be display real-time on the APP.

APP Function



Tip here to enter the full function operation interface.

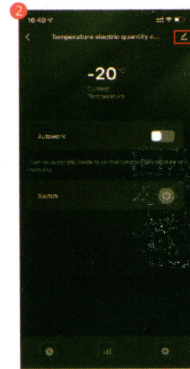

Rename
/Offline Notification
/Third-party Control
/Share Device
/Create Group
/Remove Device

/Timer
/Cutdown
Statistics
/Humidity
/Energy
Set
/Temperature range
/Delay to turn on
/turn on alert
/Temperature unit setting
/Temperature calibration

TROUBLESHOOTING

Enter the homepage of App,click the icon in the lower right corner of the interface to enter.

